



INTRODUCING THE NEW HORIZON DI-LEV 5 DIGITAL LEVEL
AN ADDITIONAL PRECISION IN LEVELING WORK



The HORIZON Di-Lev digital level allows for precise leveling of both flat and gradient planes, and performs tasks with much more precision, speed, competency and convenience as compared to using the traditional optical level.

In addition, measurement errors are reduced through digital read-outs and the data collected could be transferred to other storage media conveniently via the accompanying software.




Side view



Front view



View Finder Side

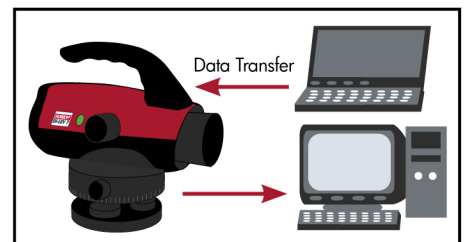


Data Transfer software included

HORIZON®
MEASURE RIGHT



ASME LIANHE ZAOBAO AWARD
2007 Singapore Prestige Brand
Winner, SPBA - Regional Brands

DIGITAL LEVEL MODEL SPECIFICATIONS		DI-LEV 5	DI-LEV 7	DI-LEV 10	DI-LEV 20
Height measurement precision (standard deviation of Round-trip measurement per kilometer)	Invar Staff	0.5mm	0.7mm	1.0mm	2.0mm
	Fiberglass Staff	1mm	1.2mm	2mm	2.2mm
	Optical reading	2.0mm			
Distance measurement precision	Figure reading	D≤10m:10mm;D>10m:Dx0.001			
measuring range	Figure reading	1.5m~100m			
Minimum display	VD	1mm/0.1mm			
	distance	0.1/1cm			
Measuring time		<3"			
Telescope	Magnification	32×			
	Resolution	3"			
	Field of view	1°20'			
	Stadia ratio	100			
	Stadia addition constant	0			
Compensator	Type	Tilting magnetic damping compensator			
	Compensation range	>±12'			
	Compensation accuracy	0.30"/1'			
Data storage	memory	16MB			
	Point number	Increment / decrement / custom			
	interface	USB			
	External Storage	SD card			
Sensitivity of Circular bubble		8'/2mm			
Automatic power off		Five minutes/OFF			
Horizontal dial	scale value	1°			
Display		160 x 64 dot matrix LCD with illumination			
temperature		-20° - 50°			
Size		230mm(length)×150mm(wide) ×210mm(height)			
weight		2.5kg			
Power supply details	B-21 NiMH rechargeable battery, 2100mAh, two packs Volt: 4.8v Limited charge voltage: 6v±0.05v Duration of charge: approximate 4 hours				
Display details	4-lines, 20-digit per line, 160*64 Dot matrix LCD with brightness-adjustable backlight				
Data storage capacities	Internal flash memory: 16M External storage card: Micro SD card, 2G				
Data downloading format/ conversions	Equipped with Data Transferring cable and attached CD containing drivers that comply with Silicon Laboratories CP210X VCP standard for different computer operation system and transfer/conversion software. Measuring data can be easily downloaded and transferred to preferable format such as .excel or other software format. The file extension name stored in Flash or SD card can be automatically named as .M, .L, or .A that depends on the type of the jobs				
Standard accessories with each instrument	1x Data Transfer cable 1x NiMH battery charger: input AC100-240v, output 4.8v DC 2x NiMH battery pack 1x CD 1x 2G Micro SD card 1x Allen key 1x adjusting pin 1x operation manual				
Details of measurement programs	According to actual need, it can choose to work in Standard Mode, Leveling Mode, and Adjustment Mode (for electronic outdoors adjustment). It can record staff reading, sight distance, and height difference. At the end of survey, the measuring results will be automatically calculated and displayed for evaluation.				

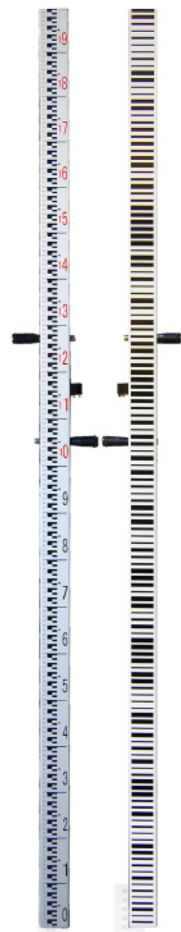

Each Instrument comes with 2x 2metre bar coded fiberglass staves. The Di-Lev 20 comes with 2 aluminium bar coded staves.

SINGAPORE
SURVEY
INSTRUMENTS
SERVICES PTE LTD
50 Playfair Road,
#08-01 Noel Building,
Singapore 367995
Tel : (65) 6288 4622
Fax : (65) 6288 2033
Email : info@horizon.sg

BRAZIL
E.V.N AUTOMAÇÃO
E COMERCIO DE
EQUIPAMENTOS
DE INFORMÁTICA
LTD.A. ME (METRICA)
Av. Independência
308 Bairro Alto
Piraicabana – SP – Brazil
ZIP 13.419-160
CNPJ: 01.227.689/0001-54
Tel: +55 (19) 3432-5556

CHINA
SIS SHANGHAI
Shanghai
Room 10C 32 10th Floor
2299 Yan An Road (West)
Shanghai 200336
Tel : +86-21-6236 0569
Fax : +86-21-6236 0614

EUROPE
HORIZON
INSTRUMENTS BV
Boxmeerseweg 2D
5835 AC Biezen,
The Netherlands
Tel : +31 485 361 053
Fax : +31 485 361 054

INDIA
Ansari Precision
Instruments Pvt Ltd
261, Old Tehsil, Behind Id-Gah
Delhi-Dehradun main road
Roorkee 247-667, India
Tel: +91-1332261277
Fax: +91-1332264277
Email: info@apirotator.com

INDONESIA
PT KESUMA
Jl. Raya Pasar Jumat No. 45A
Lbk Bulus Jakarta 12310
Indonesia
Tel: (62) 21-7591-7538
Fax: (62) 21-7591-7537

MALAYSIA
SICCION MARKETING, INC.
2nd Floor, CBS Building,
1800 A, Mendoza Street,
Sampaloc, Manila 1008,
Philippines
Tel: 63-27326771
Fax: 63-27328647
Email:
sales@siccionmarketing.com

THE PHILIPPINES
SICCION MARKETING, INC.
2nd Floor, CBS Building,
1800 A, Mendoza Street,
Sampaloc, Manila 1008,
Philippines
Tel: 63-27326771
Fax: 63-27328647
Email:
sales@siccionmarketing.com

USA
HORIZON
MEASUREMENTS INC.
215 West 6th Street
Unit 101 San Bernardino
California 92401 USA
Tel: +1-909-889-6020
Fax: +1-909-889-6080
Toll Free: 1-888-710-8282